40 Years of Excellence

ISO 9001:2008

SUNANDA
SPECIALITY COATINGS PVT. LTD.

Consultants for Building Materials
Manufacturers of Construction Chemicals since 1979

SUNEXT – 8

100% Acrylic, Decorative, Waterproofing, Exterior, Anti Carbonation Coating

CONCRETE MATERIALS CONSULTANCY DIVISION

Sunshine Tower, 36th Floor, Senapati Bapat Marg,
Lower Parel.
Mumbai – 400 013, India.
Tel: +91-22-62268000

Email : info@sunandaglobal.com
Website : www.sunandaglobal.com

INDIA • U.S.A. • U.A.E. • TANZANIA • GHANA • KENYA
ETHIOPIA • MALDIVES • NEPAL • AFGHANISTAN •
RUSSIA • OMAN

INDEX

SR. NO.	PARTICULARS
1	**TECHNICAL DATA SHEET**
2	**SUNEXT - 8 SHADE CARD**
3	**APPRECIATION LETTER OF NEHRU CENTRE**
4	**TEST REPORTS**
	Depth of Carbonation by Phenolphthalein test
	Anti-Carbonation Test at VJTI
	Anti Carbonation Test of Sunext - 8
	Heat Insulating Test of Sunext - 8
	Report on Carbon Dioxide Diffusion Resistance of Sunext - 8 As per the DIN EN 1062 (2002-10)
	Solar Reflectance Index (SRI) Value Test Certificate
5	**PHOTOGRAPHS OF COMPLETED PROJECTS**

TECHNICAL DATASHEET

SUNANDA
SPECIALITY COATINGS PVT.LTD
AN ISO 9001:2008 COMPANY

TECHNICAL DATASHEET

SUNEXT - 8

100% Aliphatic Acrylic, Decorative, Waterproofing, Heat Insulating, Exterior, Anti-Carbonation Coating

DESCRIPTION

SUNEXT- 8 is a 100% aliphatic, acrylic polymer chemistry based heat insulating, waterproofing, and anti- carbonation exterior coating.

USES

- Protects external surfaces against carbonation and similar environmental attacks.
- Provides durable and long lasting finish to the external surface.
- Can withstand extreme climatic changes like heavy rainfall, high humidity and heat.

ADVANTAGES

- A single component liquid that is easily applied by brush.
- Protects the structures from water leakages or dampness.
- Prevents rise in internal temperature.
- Does not peel or crack.
- Prevents carbonation of concreted and thereby increases the total service life of the structure, thus reducing maintenance cost per year.
- Prevents formation of fungi and algae hence, exteriors look freshly painted for years.
- Has excellent UV stability.
- Has a fairly good resistance to abrasion due to normal wear and tear.

INSTRUCTIONS FOR USE

Surface Preparation

- Life and performance is directly dependent on the extent and quality of cleaning.
- Clean the surface to remove dirt, loose particles, flaking paint, etc.
- Examine the surface closely for any cracks or openings.
- Fill cracks and blowholes with POLYFILL AR and for specialized cracks use POLYALK EP mortar.
- In case of steel surfaces, remove all scales, rust and grease.

Application

- Open the container and stir well with a Mechanical stirrer to attain uniform consistency.
- Mix one litre SUNEXT-8 with potable water as per table below in a clean container.
- Stir thoroughly.
- Apply by brush, roller or spray.
- Depending on the recommendations, apply two or three coats.
- Maintain a minimum interval of 4-6 hours between successive coats.
- During the entire application & set period protect the coating from dust, dirt and grease.

PHYSICAL AND CHEMICAL PROPERTIES

Appearance	White / pigmented viscous emulsion
Odour	Slight acrylic odour
Specific Gravity	1.3 ± 0.1 at 25°C
pH	7.0 to 10.00
Viscosity	18 to 30 sec. at 25°C by Ford Cup No. B-4 (Dilute 2 parts of product with 1 part of water)
CO_2 diffusion resistance co-efficient (DIN EN 1062-6 (2002-10)	$7.59*10^5$
CO_2 diffusion equivalent air layer thickness (DIN EN 1062-6(2002-10)	127m @ 190 microns DFT
Adhesion (ASTM D 4541	2.3 N/mm² (Concrete / Substrate Failure)

Solar Reflectance Index (ASTM E 1980 -11,EN 673:2011, EN 410:2011)	107
Coverage	10 – 12 m²/litre/ coat on smooth surface. Depends on nature of the surface and number of coats.

PACKING

- 20 litre HDPE buckets.

COLOUR

- Available in all shades. However, off white, ivory and light shades are recommended.

STORAGE & SHELF LIFE

- 12 months when stored in a cool & dry place; away from direct sunlight, in original sealed packing.

HAZARDS IDENTIFICATION

- Health hazards: No particular hazard known. If the product spills on to the skin and dries up, some irritation may occur.

FIRST AID MEASURES

- Skin contact: Immediately wash thoroughly with soap and water.
- Inhalation: Remove to open air. Seek medical attention.
- Contact with eyes: Immediately wash under running water with eyelids open for at least 15 minutes. Seek medical attention.
- Ingestion: Rinse mouth thoroughly and drink plenty of water. Seek medical attention.

ACCIDENTAL RELEASE MEASURES

- Environment Care: Clean small spillages immediately with water. Contain large spillages with suitable absorbent materials.
- Dispose the waste water/absorbent material in accordance with local regulations.

QUALITY ASSURANCE

All products are manufactured under a Quality Management System for Design, Manufacturing and Selling of Construction Chemicals as per the standards of ISO 9001: 2008.

DISCLAIMER

This information is accurate and reliable to the best of the knowledge. It is meant as a guideline only. Sunanda Speciality Coatings Pvt. Ltd. (SSCPL) cannot give any guarantees under any circumstances for the results, or assume any obligation or liability in connection with the use of this information. It is recommended that the product be tested to determine its suitability for specific applications. Since, SSCPL has no control over how others may use its products; it is recommended that the Specifier, Architect, Engineer, Contractor and Owner assume all the responsibilities in connection therewith.

SUNANDA
SPECIALITY COATINGS PVT.LTD
AN ISO 9001:2008 COMPANY

SHADE CARD

Sunext-8

HEAT INSULATING - WATERPROOF

- Jasmine Wisp
- Antique White
- Bone White
- Crusade
- Ivory
- Mid Cream
- Peach Bloom
- Sands of Time
- Buttercup
- Burnt Yellowstone
- Light Pink
- Candy Pink
- Light Biscuit
- Sandstone
- Signal Red
- Silver Grey
- Flame
- Rhinestone
- Terracotta
- Marble Grey
- Nut Brown
- Mist Grey
- Ice Blue
- Aquamarine
- Platinum Grey
- Granite Grey
- Revel
- Wedgewood
- Oxford Blue
- Rhine Blue

Also available in **WHITE.**

EXTERNAL ACRYLIC COATINGS

- Sweet Lime
- Waterside
- Light Olive
- Pista
- Green Gold
- Mehendi


Hotel Park Plaza, Royal Palms, Mumbai.


Nehru Centre, Mumbai.


Magarpatta Township, Pune.


J.W. Marriott Hotel, Mumbai.

Directions for Use :

Clean the surface thoroughly to remove all contaminations. Fill cracks if any with Polyfill-AR. Allow to dry. Mix one litre Sunext-8 with 500 ml. water and apply by brush. Apply 2-3 coats at 4-6 hours interval. For priming, mix one litre Sunext-8 with one litre water.

Shades are shown for indication purpose only.

APPRECIATION LETTER FROM NEHRU CENTRE



NEHRU CENTRE, MUMBAI



NEHRU PLANETARIUM, MUMBAI

Chairman : **Shri Sharad Pawar**
Vice Chairman : **Shri R. D. Pradhan**
General Secretary : **Shri I. M. Kadri**
Treasurer : **Shri Deepak Parekh**

No.NC/MD-1/34 /1589/2005

Nehru Centre

December 23, 2005

To,
Mr.Nikhil M. Joshi
Assistant General Manager
Sunanda Speciality Coatings Pvt. Ltd.
2, Anik Court,
Pandurang Naik Marg,
Mahim,
Mumbai - 400 016.

Sub : Acceptance of Sunext-8 acrylic based exterior paint ultra vide shade for Nehru Centre's prestigious project DOI & Planetarium.

Ref : Your offer vide 11th November, 2005.

Dear Mr.Nikhil Joshi,

This has a reference to the meetings we had in connection with your Sunext-8 innovative coating for exterior paint, acrylic based for our project DOI Building's-Western-side and periphery's of Planetarium.

We are very pleased to introduce your paint in lieu of earlier accepted Asian Paints-Apex, since your paint is guaranteed for additional benefits for heat reflection. Since our painting agency is already placed with work of application of the paint, your material will be procured through them and will be used for the above two projects.

The painting agency for Nehru Centre's external as well as internal painting works is M/s.Y.B.Pawar Enterprises situated at 22/D, Bane Compound, Sane Guruji Marg, Tardeo, Mumbai - 400 034 and Shri Mohan Y. Pawar will get in touch with you for co-ordination in respect of requirements of the materials, delivery schedule for the same and the payment.

We assure you of your association with Nehru Centre through this material as well as we will try to use other products of your Sunanda Speciality Coatings Pvt. Ltd.

Thanking you and assuring you of our fullest co-operation. I remain yours truly.

(M. B. Tawade)
Dy. Director (Civil/Exhibitions)

Discovery of India, Dr. Annie Besant Road, Worli, Mumbai - 400 018. Tel. 2496 4676-80, Fax : 2497 3827

TEST REPORTS

Telegram : "VIJETINST" Matunga, Mumbai 400019

Tel : 24198100,
24146972-6 (5 Lines)
FAX : 91-022-4152874

VEERMATA JIJABAI TECHNOLOGICAL INSTITUTE

[Central Technological Institute, Maharashtra State]
Matunga, Mumbai 400019

TECHNICAL & APPLIED CHEMISTRY DEPARTMENT

TECHNICAL TEST REPORT ON TEST SAMPLE CLAIMED ANTI CARBONATION COATING "SUNEXT – 8"

Ref: 2011 / 12 / 36

12th December, 2011

Tested for : Manager – Projects
M/s Sunanda Speciality Coating Pvt. Ltd.,
Satyadham CHSL Road No.2,
Sion (East), Mumbai – 400 002.

13 DEC 2011

Party's Ref. No. : SSCPL / VJTI / 01SR dated 01/11/2011

Our Reference : Bill No.49584 for Rs.18,200/- Receipt No.50575.

Test Sample : of Anti Carbonation Coating of "SUNEXT-8" to Protect concrete members.

Testing required by the party: As per letter.

Method of Testing: Depth of Carbonation by Phenolphthalein Test.

1. Surface of concrete cubes of size 100mm were cleaned thoroughly on all sides of the cube with wire brush followed by an air jet. One coat of primer and two coats of SUNEXT-8 were applied as per specifications. After drying, the coated specimens were air cured at ambient temperature for 7 days.
2. Set of cubes (coated and uncoated) were placed in the desiccator filled with carbon dioxide gas. Special assembly was made.
3. Cubes were drilled at various locations and phenolphthalein was dropped.
4. Depth of carbonation was checked by phenolphthalein indicator test at intervals of 12 hours, 24 hours, 3 days, 7 days.
5. The depth of carbonation was measured as the depth from the external top surface of the cube to the plane where the phenolphthalein turns pink or remains colorless.
6. Pink color indicates concrete is in alkaline state, showing no carbonation and colorless concrete indicates concrete is in showing carbonation attack.

Results:

No.	Test Conducted	SUNEXT-8 coated cube	Uncoated (Control) concrete cube
1.	Percentage water absorption after 24 hours	Nil	1.05
2.	Depth of carbonation measured		
	After 12 hours	Nil	3 mm
	After 24 hours	Nil	5 mm
	After 3 days	Nil	10 mm
	After 7 days	Nil	15 mm

Note : The test results are concerned only with the supplied specimens.
Remarks : The entire tests including application of SUNEXT-8 coating are carried out in our laboratory.

Testing Incharge

Head of Tech. & Applied Chemistry Dept.

Ref. No.TST / 4 / Chem / 5136 / 11

aas/nnw/sp shm/dsm/avl/cra/mgj/pss/awd/rsn


VEERMATA JIJABAI TECHNOLOGICAL INSTITUTE, MATUNGA, MUMBAI-400 019
T & A Chemistry Department




Uncoated Controlled concrete cube



Concrete cube coated with **SUNEXT – 8** 100% Acrylic Anti-Carbonation Coating

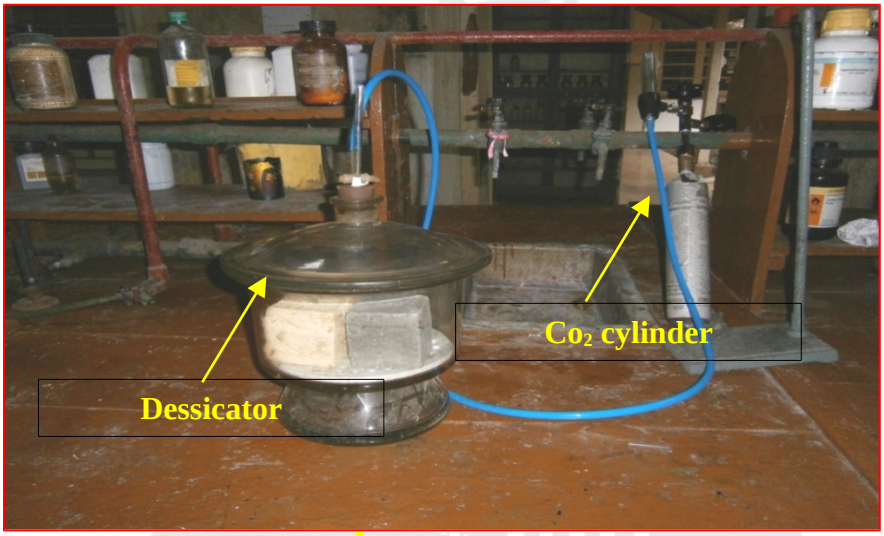


Cubes placed in dessicator filled with **CARBON DIOXIDE**

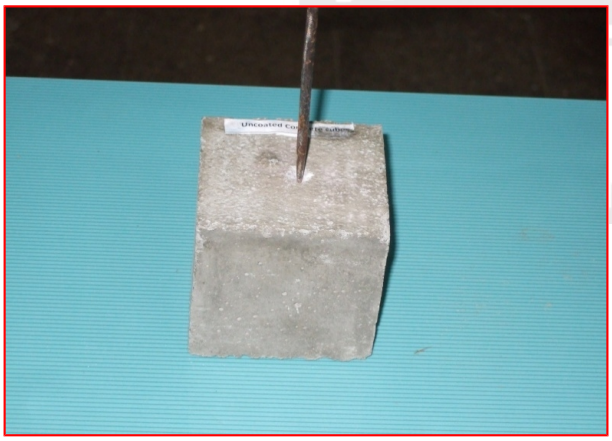


Drilling of uncoated concrete cube



Drilling of **SUNEXT-8** coated concrete cube

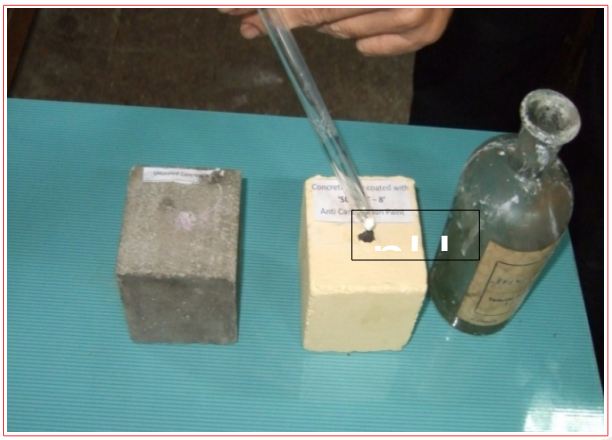


Phenolphthalein Test concrete cubes.

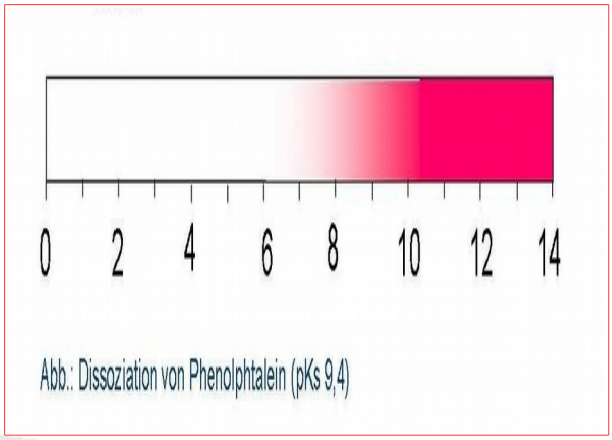


UNIVERSAL INDICATOR – PHENOLPHTHALEIN Colour change pattern for acidic / alkaline **range**



SUNEXT-8 coated concrete cube shows pink colour after dropping of Phenolphthalein

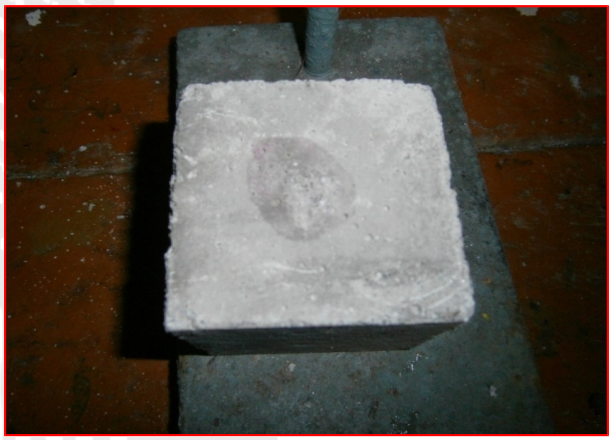

No colour change (colourless) on uncoated concrete cube

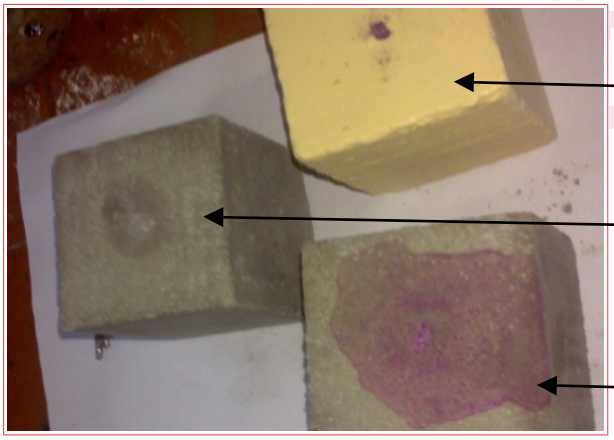

Concrete cubes coated with **'SUNEXT – 8**

Concrete cubes **without** coating of **'SUNEXT – 8'**

Fresh Concrete cube

Anti Carbonation Test of Sunext-8

Telegram : "VIJETINST" Matunga, Mumbai 400019

Tel : 24198100,
24146972-6 (5 Lines)
FAX : 91-022-4152874

VEERMATA JIJABAI TECHNOLOGICAL INSTITUTE

[Central Technological Institute, Maharashtra State]
Matunga, Mumbai 400019

TECHNICAL & APPLIED CHEMISTRY DEPARTMENT

TECHNICAL TEST REPORT ON TEST SAMPLE CLAIMED ANTI CARBONATION PAINT

Ref: 2010 / 10 / 22

19th October, 2010

Tested for : S.N. Bhobe & Associates Pvt. Ltd.,
Banking Complex No.II,
Unit No.10, Plot No.9 & 10,
Sector – 19A, Vashi,
Navi Mumbai – 400 075.

Party's Ref. No. : Dated 28/08/2010.

Our Reference : Bill No.49691 for Rs.3,006/- Receipt No.47330.

Test Sample : of Anti Carbonation Paint, Sub: Construction of Flyover at Times of India Junction at Malad on WEH, Contractor – M/s Ameya Developers & J. Kumar (JV), Mfg. Sunanda Chemical.

Testing required by the party : As per letter.

Results:

No.	Tests	Results
1	Appearance	Sp Ivory colored viscous emultion
2	Viscosity (ford cup No.B-4)	22 seconds
3	Specific Gravity	1.31
4	pH	9.3

Note : The test results are concerned only with the supplied specimens.
Remarks : Testing charges paid by M/s Ameya Developers & J. Kumar (JV).

Head of Tech. & Applied Chemistry Dept. **Director**

Ref. No.TST / 4 / Chem / 5111 / 10

aas/nnw shm/dsm/avl/cra/mgj/pss/awd/rsn

Heat Insulating Test of Sunext – 8 at Structwel Designers & Consultants Pvt. Ltd.

R & D UNIT

STRUCTWEL DESIGNERS & CONSULTANTS PVT. LTD.

401/402, Raikar Bhavan, Sector 17,
Vashi, Navi Mumbai - 400 703.
Tel. 2789 06 16 [5 Lines]
e-mail : structwel@vsnl.net
Fax : 91-22-2789 08 40
web : http://www.structwel.com

CHETAN R. RAIKAR
Managing Director

CERTIFICATE NO. & DATE	**R&D/LAB/2005/433393/3885 03/02/2005** PAGE 1 OF 1
1. Name & Address of Client	M/s. Sunanda Speciality Coatings Pvt. Ltd. 2, Anik Court, Pandurang Naik Marg, Mahim, Mumbai-400 016.
2. Project / Site	Self.
3. Client's Reference	Letter dtd. 15-01-05
4. Sample	
i) Description	Polymer
ii) Quantity	1 No.
iii) Date of receipt	17/01/2005
iv) Condition	Acceptable
5. Test method followed, if any	--
6. Date of Testing	27/01/2005

TEST REPORT

Description : **Exterior coating**
Name of Product : **Sunext-8**
Name of Manufacture : **M/s. Sunanda Speciality Coatings Pvt. Ltd., Mumbai.**

The Test has carried out as per procedure given by the client

Procedure

1. Two tin sheets were checked for heat insulating properties.
2. One sheet had two coats of Sunext-8 applied and another sheet had cement coating.
3. These two sheets were simultaneously heated with an infrared lamp and the temperatures were cheked on the underside of both these tin sheets with an infrared meter.

Observation

a) Room temperature : 29 °C
b) Suface temperature of tin sheet : 29 °C

Sr. No.	Time (min)	With two coat of Sunext-8	Temperature without Sunext-8 (Cement Coating)
1.	2	34 °C	124 °C
2.	4	39 °C	142 °C
3.	6	38 °C	141 °C
4.	8	41 °C	151 °C
5.	10	43 °C	149 °C

NOTE :

-- This certificate refers only to the sample submitted for testing.
-- This certificate is valid at the time of and under the conditions specified herein.
-- This certificate may not be reproduced in part, without the permission of this laboratory.
-- Any correction invalidates this certificate.

my\D:\Report 2004-05\Chemical\Polymer\433393.xls

EXECUTIVE - R&D

● Hologram authenticates reports ● Hologram authenticates reports ● Hologram authenticates reports ● Hologram authenticates reports ● Hologram authenticates reports

Report on Carbon Dioxide Diffusion Resistance of SUNEXT – 8
As per the DIN EN 1062 (2002-10)
At Institute of Chemical Technology

INSTITUTE OF CHEMICAL TECHNOLOGY रसायन तंत्रज्ञान संस्था
University under Section-3 of UGC Act 1956 | Estd.1933 | NBA Accredited, Grade 'A' by MHRD | UNIVERSITY PAR EXCELLENCE

Date: April 30, 2012

To,
MEP Infrastructure Pvt. Ltd
410 boomrang, Chandivali Farm Road,
Near Chandivali Studio, Andheri (East), Mumbai – 400 072

Subject: Report on Carbon Dioxide Diffusion Resistance of "SUNEXT 8" as per the DIN EN 1062 (2002-10)

Reference.: Your letter dated 09th April 2012 received along with the sample.

Dear Sir,
With reference to above, the results of the carbon dioxide diffusion resistance and other parameters related to your coating is given below:

DIN EN 1062-6 (2002-10) Coating materials and coating system for exterior masonry and concrete		
Sr. No.	Performance Characteristics	Value Observed
1	DFT	190 micron
2	CO_2 diffusion resistance coefficient	7.59×10^5
3	CO_2 diffusion equivalent air layer thickness	127 m @ 190 microns DFT
Performance characteristics for coatings as per ASTM standards		
4	a. Chloride ion diffusion (ASTM C 1202) b. Chloride ion diffusion coefficient	Zero penetration in 15 days 1.01×10^{-7}
5	Adhesion Strength (ASTM D 4541)	2.3 N/mm^2 (Concrete failure)
6	Elongation (ASTM D 2370/98)	408 % @190 microns DFT

Remark: The coating SUNEXT 8 has good Anti-carbonation properties
Please note that the results pertain only to the sample supplied to us. .
Yours Sincerely

Dr. S. T. MHASKE
Institute of Chemical Technology
(University under Section-3 of UGC Act. of 1956)
Matunga, Mumbai - 400 019.

Dr. S. T. Mhaske
Dept of Polymer & Surface Engineering
ICT, Mumbai

Note: The results contained in this test certificate are only related the sample tested. This test certificate is intended only for your guidance and not valid for legal purpose or advertisement. This test certificate shall not be reproduced except in full without written approval of this institution.

Nathalal Parekh Marg, Matunga,
MUMBAI - 400 019. INDIA
www.ictmumbai.edu.in

Tel : +91-22-3361-1111 / 2222
Fax : +91-22-3361-1020
Email: initials.surname@ictmumbai.edu.in

SUNANDA
SPECIALITY COATINGS PVT.LTD
AN ISO 9001:2008 COMPANY

Solar Reflectance Index (SRI) Value Test Certificate FROM CEPT, AHMEDABAD

BUILDING ENERGY PERFORMANCE LABORATORY

Test Report for Solar Reflectance Index (SRI)

T-2169

Report No: BEPL/RPT/SRI/122 Report Date: 13th February 2014

Report of test carried out by CEPT – CARBSE: BEPL for Solar Reflectance Index of Supplied Material

The test results of the specimen submitted for Solar Reflectance Index on date 13th February 2014 are as under:

1. **Customer Information**

1.1. **Name of the Organization**	: Sunanda Speciality Coatings Pvt. Ltd.
1.2. **Contact Person**	: Mr. Nikhil Joshi / Ms. Ishita Manjrekar
1.3. **Address**	: Satyadham, Road No. 2, Sion (E) Mumbai – 400 022
1.4. **Phone Numbers**	: 022 – 24034130 / 9820155076
1.5. **Fax Number**	: 022 - 24034130
1.6. **Email**	: nmj@sunandaglobal.com / info@sunandaglobal.com

2. **Sample Details**

2.1. Sample Identification Number	: SRI/02/14/1123
2.2. Date of Test	: 13th February 2014
2.3 Name and any other pertinent Identification of the material (including physical description):	Sunext - 8
2.4 Thickness of the specimen (Reported)	: ---
2.5 Thickness as tested	: Not Applicable
2.6 Condition of Sample when received	: Satisfactory
2.7 Method and Environment used for conditioning (if used)	: Not Applicable
2.8 No. of Surfaces	: Not Applicable
2.9 The type of surfaces	: Not Applicable
2.10 Position of panes (if Multiple Glazed)	: Not Applicable
2.11 The position of coating(s) designating faces of the panes as 1, 2 , 3 starting from the outer surface of pane 1:	Not Applicable
2.12 The face of the panes (if Coated)	: Not Applicable
2.13 Instrument used	: Spectrophotometer with integrating sphere with reference material spectralone & FTIR with IR specular reflection set.
2.14 Boundary Conditions (Test Method)	: As per ASTM E 1980-11, EN 673:2011, and EN 410:2011.
2.15 Tested By	: Mr. Jigar Patel, Lab Technician

BEPL, Centre for Environmental Planning and Technology, K. L .Campus, Navrangpura, Ahmedabad- 380 009.
Phone No: 079-26302470- Extn: 383, 26302740 Fax: +91 79 26302075.Email: ashajoshi@cept.ac.in/bepl@cept.ac.in

BUILDING ENERGY PERFORMANCE LABORATORY

Test Report for Solar Reflectance Index (SRI)

T-2169

Report No: BEPL/RPT/SRI/122 Report Date: 13th February 2014

3. Results of the measurement:

Solar Direct Reflectance

Sample name	Sample ID	Measurement 1	Measurement 2	Measurement 3	Average
Sunext - 8	SRI/02/14/1123	0.8478	0.8479	0.8481	0.8479

Emissivity

Sample name	Sample ID	Measurement 1	Measurement 2	Measurement 3	Average
Sunext - 8	SRI/02/14/1123	0.936	0.936	0.936	0.936

Solar Reflectance Index (SRI) under different wind conditions

Sample name	Sample ID	Solar Reflectance Index (SRI)		
		Low Wind(h_c=5 W m^{-2} K^{-1})	Medium Wind(h_c=12 W m^{-2} K^{-1})	High Wind(h_c=30 W m^{-2} K^{-1})
Sunext - 8	SRI/02/14/1123	108	107	107

Surface Temperature (T_S) under different wind conditions

Sample name	Sample ID	Surface Temperature (°C)		
		Low Wind(h_c=5 W m^{-2} K^{-1})	Medium Wind(h_c=12 W m^{-2} K^{-1})	High Wind(h_c=30 W m^{-2} K^{-1})
Sunext - 8	SRI/02/14/1123	44.8	41.8	39.4

4. Certificate of Accuracy:

This is to certify that the test results herein presented are, to the best of my knowledge, true and accurate representations of the samples submitted.

Dr. V. P. Patel
Technical Director
Building Energy Performance Laboratory

Disclaimer:

1. *The CSEE / BEPL are not responsible for any kind of alterations in the physical property of the sample and the customer is solely responsible for it and its consequences.*
2. *Result relates to the sample tested only. Sample will be destroyed after 7 days of issue of the report unless specified by the customer.*
3. *Any complains about this report should be communicated in writing within 7 days of issue of the report.*
4. *The test report shall not be reproduced fully or partially or in parts and cannot be used as an evidence in a court of law and shall be used in advert singeing media without written approval of Executive Director, BEPL*

BEPL, Centre for Environmental Planning and Technology, K. L .Campus, Navrangpura, Ahmedabad- 380 009.
Phone No: 079-26302470- Extn: 383, 26302740 Fax: +91 79 26302075.Email: ashajoshi@cept.ac.in/bepl@cept.ac.in

PHOTOGRAPHS



HOTEL J.W.MARRIOTT, MUMBAI



HOTEL PARK PLAZA, MUMBAI



EVERSHINE CITY, VASAI



EVERSHINE WOODS, MIRA ROAD



RNA COURTYARD-MIRA ROAD



RNA LIBERTY-MIRA ROAD



MAGARPATTA TOWNSHIP- COSMOS, PUNE



MAGARPATTA TOWNSHIP-IRIS, PUNE



KUMAR PRIYADARSHAN, PUNE



KUMAR PADMALAYA, PUNE



KUMAR PARAGON PUNE



KUMAR PUSHP, PUNE



MAKER MAXITY- BKC, MUMBAI



NAMAN CENTRE- BKC, MUMBAI



RIL TOWNSHIP AND PLANT, NAGOTHANE



RELIANCE ENERGY LTD, MUMBAI





HOTEL CABANA, FLORIDA, U.S.A.



SOBHA IVORY TOWER I & II, DUBAI, U.A.E.



ARATICA YOGA CENTRE, MULSHI, PUNE



RIVERGATE RESORTS, KARJAT



H. N. HOSPITAL, MUMBAI



PASSPORT OFFICE, BKC, MUMBAI



VIPASSANA INSTITUTE, IGATPURI



SUPREME PETROCHEMICALS, NAGOTHANE





GOVERNMENT COLONY, BANDRA



PALAIS ROYALE, WORLI, MUMBAI



SEIMENS, MUMBAI



SUNSHINE TOWER, MUMBAI



SUPREME BUSINESS PARK POWAI, MUMBAI



J. K. HOUSE, BREACH CANDY